

Hydrophobic
Preloaded IOL

Manufactured by Synchronised Cast Molding Procedure

VACRIOLTM EC Versatile

Preloaded IOL




Aberration Controlled | Preloaded Delivery System
Yellow Foldable | Micro Incision Lens


Patent No. EP: 2591025
US: 9622853

Hydrophobic
Preloaded IOL

ELP Optimized Design for Predictable Refractive Outcome

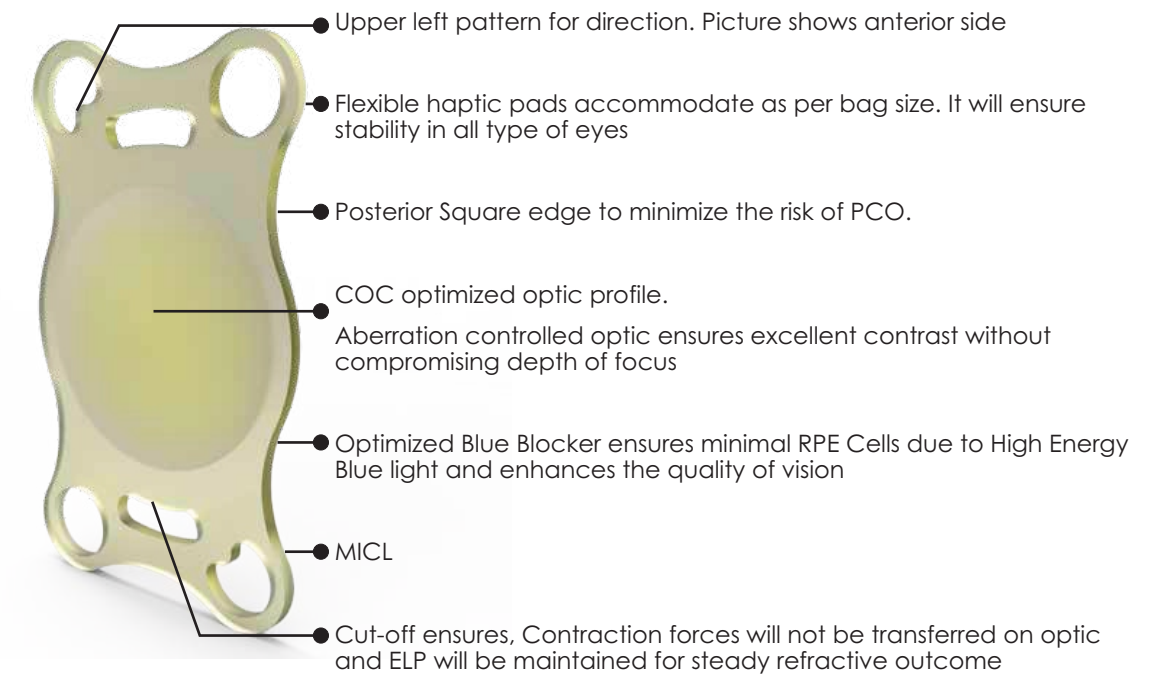

Specification:

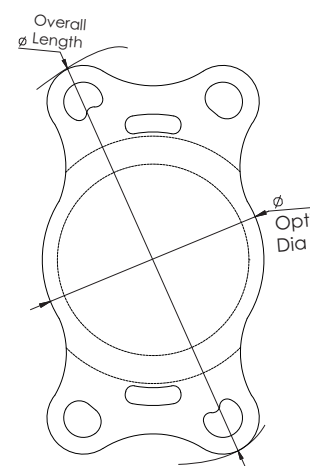

Model	AS-6VP
Material	Hydrophobic (Yellow Tinted)
IOL Powers	+0.0 D to +27.0 D (0.5 D Steps)
Optic Diameter	6.00 mm
Overall Length	11.00 mm (Customized Range 10.50 mm to 12.00 mm)
Optic Type	Negative Aspheric Optic
Haptic Angulation	0° (Plano)
Haptic Configuration	Plate - Accommodative Haptic
Refractive Index	1.53
A-Constant	118.8 (US Biometry)*
	119.3 (Optical Biometry)*
	1.91 (Barrett Universal II LF)*

*The mentioned value are estimates. It is recommended that the surgeon derives his/her own values based on the refractive outcome.



CAREGROUP SIGHT SOLUTION PRIVATE LIMITED
Block No.: 310/C&E, Village Dabhaha, Taluka - Padra,
Dist. Vadodara - 391 440, Gujarat, India.
customer@caregroupiol.com
www.caregroupiol.com